


Bodies, Clevis Blanks & Links



- Drop Forged Steel
- Heat Treated
- 5:1 Safety Factor

Turnbuckle Bodies Self Colored

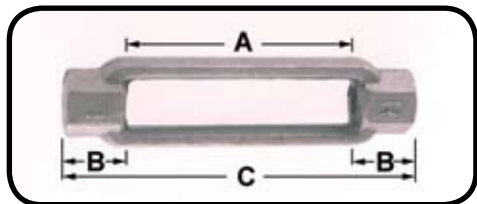


Thread Dia X Take Up (in)	Working Load Limit (lbs.)	Weight Each (lbs.)	Dimensions (in)		
			A	B	C
3/8 X 6	1,200	.29	6	5/8	7-3/8
1/2 X 6	2,200	.60	6	1	7-7/16
5/8 X 6	3,500	.90	6	1-1/16	8-3/16
3/4 X 6	5,200	1.30	6	1-5/32	8-7/16
7/8 X 6	7,200	1.79	6	1-5/16	8-3/4
1 X 6	10,000	2.10	6	1-3/8	8-15/16
1-1/8 X 6	15,000	2.78	6	1-1/2	9-7/32
1-1/4 X 6	15,200	3.43	6	1-11/16	9-11/16
1-1/2 X 6	21,000	6.16	6	1-7/8	10

Clevis Blanks Self Colored



Clevis Size	Max Thread Diameter (in)	Max Pin Diameter (in)	Rated Capacity (lbs)	Approx Weight ea (lbs)
#2	5/8	3/4	3,500	1.0
#2-1/2	7/8	1-1/2	7,500	2.5
#3	1-3/8	1-3/4	15,000	4.0
#3-1/2	1-1/2	2	18,000	6.0
#4	1-3/4	2-1/4	21,000	9.0
#5	2-1/8	2-1/2	37,500	16.0

Alloy Coupling Links Painted



Chain Size (in)	Weight Each (lbs)	Working Load Limit (lbs)	Dimensions (in.)			
			A	B	C	D
9/32 (1/4)	.29	3,500	.36	1.88	.78	.66
5/16	.67	4,500	.36	2.18	.91	.69
3/8	.76	7,100	.45	2.53	1.03	.88
1/2	1.06	12,000	.64	3.44	1.44	1.13
5/8	2.43	18,100	.75	4.13	1.73	1.41
3/4	4.20	28,300	.93	4.92	2.03	1.63
7/8	6.80	34,200	1.06	5.46	2.27	2.00
1	11.03	47,700	1.22	5.98	2.44	2.25
1-1/4	20.38	72,300	1.50	7.43	3.07	2.56

Designed for use with Grade 80 chain