


# Forged Weldless Links

- Drop Forged Steel
- Heat Treated
- 5:1 Safety Factor




## Oblong Master Links Alloy Steel

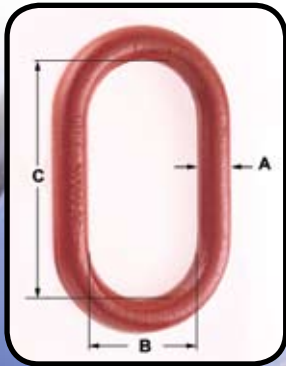

Size "A" (in)	Working Load Limit (lbs)	Weight Each (lbs)	Dimensions (in.)	
			B	C
1/2	7,000	.82	2.50	5.00
5/8	9,000	1.52	3.00	6.00
3/4	12,300	2.07	2.75	5.50
7/8	15,000	3.50	3.75	6.38
1	24,360	4.85	3.50	7.00
1-1/4	36,200	9.57	4.38	8.75
1-1/2	54,300	16.22	5.25	10.50
1-3/4	84,900	25.22	6.00	12.00
2	102,600	37.04	7.00	14.00

## Pear Shaped Sling Links Carbon Steel



Size "A" (in)	Working Load Limit (lbs)	Weight Each (lbs)	Dimensions (in.)	
			B	C
3/8	1,800	.23	1.13	.75
1/2	2,900	.55	1.50	1.00
5/8	4,200	1.06	1.87	1.25
3/4	6,000	1.88	2.25	1.50
7/8	8,300	2.75	2.63	1.75
1	10,800	4.35	3.00	2.00
1 1/4	16,750	7.60	4.00	2.50
1 3/8	20,500	11.30	4.13	2.75

**Pear Links & Round Rings Available in Alloy Steel!**

## Round Rings Carbon Steel



Size "A" (in)	Working Load Limit (lbs)	Weight Each (lbs)	Inside Diameter (in)
3/4 X 3	3,700	1.63	3.00
3/4 X 3-1/2	3,700	1.68	3.50
3/4 X 4	3,700	1.89	4.00
7/8 X 4	7,200	2.72	4.00
7/8 X 5-1/2	5,600	3.47	5.50
1 X 4	10,800	3.69	4.00
1-1/8 X 6	10,400	6.60	6.00
1-1/4 X 5	17,000	6.82	5.00
1-3/8 X 6	19,000	10.12	6.00