




Eye & Eye Swivels Hot Dipped Galvanized

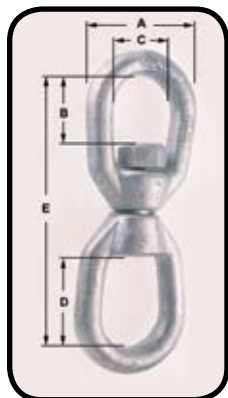

Meets Federal Spec
RR-C-271d
Type VII, Class 2


Size	Weight Each (lbs)	Working Load Limit (lbs)	Dimensions (in)				
			A	B	C	D	E
1/4	.21	850	1-1/4	11/16	3/4	1-1/16	2-15/16
5/16	.39	1,250	1-5/8	13/16	1	1-1/4	3-9/16
3/8	.69	2,250	2	15/16	1-1/4	1-1/2	4-5/16
1/2	1.43	3,600	2-1/2	1-5/16	1-1/2	2	5-7/16
5/8	2.50	5,200	3	1-9/16	1-3/4	2-3/8	6-9/16
3/4	4.13	7,200	3-1/2	1-3/4	2	2-5/8	7-3/16
7/8	4.25	10,000	4	2-1/16	2-1/4	3-1/16	8-3/8
1	9.00	12,500	4-1/4	2-5/16	2-1/2	3-1/2	9-5/8
1-1/8	12.46	15,200	5	2-3/8	2-3/4	3-3/4	10-3/8
1-1/4	16.76	18,000	5-5/8	2-11/16	3-1/8	3-11/16	11-1/8
1-1/2	45.79	45,200	7	4-3/16	4	4-3/16	17-1/8

Ultimate Load is 5 Times the Working Load Limit

See These In Our
Stainless Steel
Section

• Swivels are positioning devices and are not intended to rotate under load.

Jaw & Eye Swivels Hot Dipped Galvanized

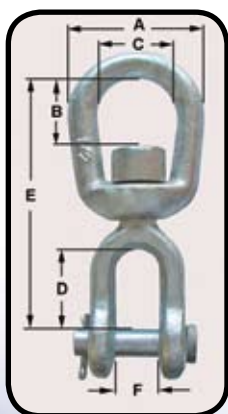

Meets Federal Spec
RR-C-271d
Type VII, Class 3

Size	Weight Each (lbs)	Working Load Limit (lbs)	Dimensions (in)					
			A	B	C	D	E	F
1/4	.25	850	1-1/4	11/16	3/4	7/8	2-5/8	15/32
5/16	.39	1,250	1-5/8	13/16	1	7/8	2-15/16	1/2
3/8	.70	2,250	2	15/16	1-1/4	1-1/16	3-5/8	5/8
1/2	1.43	3,600	2-1/2	1-5/16	1-1/2	1-5/16	4-1/2	3/4
5/8	2.50	5,200	3	1-9/16	1-3/4	1-1/2	5-5/16	15/16
3/4	4.13	7,200	3-1/2	1-3/4	2	1-3/4	6-1/16	1-1/8
7/8	5.75	10,000	4	2-1/16	2-1/4	2-1/16	7	1-3/16
1	10.25	12,500	4-1/4	2-5/16	2-1/2	2-13/16	8-9/16	1-3/4
1-1/8	12.46	15,200	5	2-3/8	2-3/4	2-13/16	8-16/16	1-3/4
1-1/4	15.75	18,000	5-5/8	2-11/16	3-1/8	2-13/16	9-7/16	2-1/16
1-1/2	54.75	45,200	7	4-3/16	4	4-7/16	14-3/4	2-7/8

Ultimate Load is 5 Times the Working Load Limit