


Turnbuckles




- Drop Forged C1035 Steel
- Heavy Hex Body
- 5:1 Safety Factor

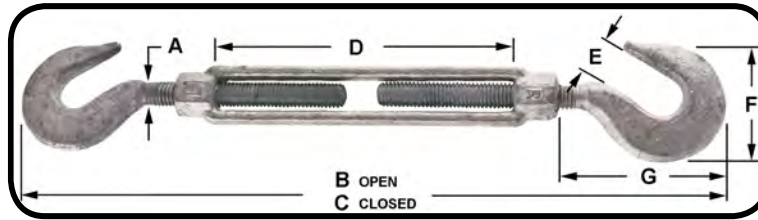

Meets Federal Spec FF-T-791b, Type 1, Form 1, Class 5

Hook & Hook Turnbuckles Hot Dipped Galvanized

Thread Dia X Take Up	Working Load Limit (lbs)	Weight Each (lbs)	Dimensions (in)						
			A	B Open	C Closed	D	E	F	G Closed
1/4 X 4	400	.29	0.25	12.09	8.09	4.00	.45	1.27	1.75
5/16 X 4 1/2	700	.49	0.31	13.47	9.47	4.50	.50	1.50	2.09
3/8 X 6	1,000	.78	0.38	17.94	11.94	6.00	.56	1.77	2.52
1/2 X 6	1,500	1.61	0.50	20.67	13.67	6.00	.66	2.28	3.23
1/2 X 12	1,500	2.26	0.50	32.67	19.67	12.00	.66	2.28	3.23
5/8 X 6	2,250	2.70	0.63	22.72	15.47	6.00	.90	2.81	3.90
5/8 X 12	2,250	3.78	0.63	34.72	21.47	12.00	.90	2.81	3.90
3/4 X 6	3,000	3.89	0.75	24.95	17.45	6.00	.98	3.33	4.69
3/4 X 12	3,000	5.83	0.75	36.95	23.45	12.00	.98	3.33	4.69
3/4 X 18	3,000	6.33	0.75	48.95	29.45	18.00	.98	3.33	4.69
7/8 X 12	4,000	8.10	0.88	38.66	24.91	12.00	1.13	3.78	5.10
1 X 12	5,000	11.93	1.00	41.20	27.20	12.00	1.25	4.25	6.36

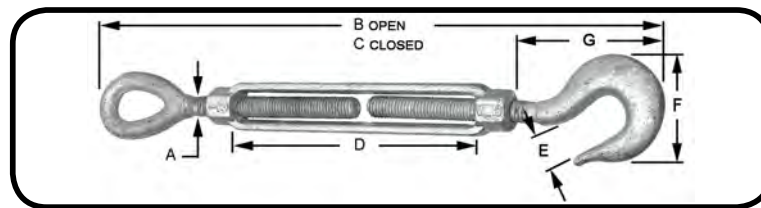

Meets Federal Spec FF-T-791b, Type 1, Form 1, Class 6

Hook & Eye Turnbuckles Hot Dipped Galvanized

Thread Dia X Take Up	Working Load Limit (lbs)	Weight Each (lbs)	Dimensions (in)						
			A	B Open	C Closed	D	E	F	G Closed
1/4 X 4	400	.33	0.25	12.29	8.29	4.00	.45	1.27	1.75
5/16 X 4 1/2	700	.54	0.31	14.28	9.78	4.50	.50	1.50	2.09
3/8 X 6	1,000	.73	0.38	18.04	12.04	6.00	.56	1.77	2.52
1/2 X 6	1,500	1.42	0.50	20.79	14.79	6.00	.66	2.28	3.23
1/2 X 12	1,500	2.05	0.50	33.08	21.08	12.00	.66	2.28	3.23
5/8 X 6	2,250	2.65	0.63	22.61	16.61	6.00	.90	2.81	3.90
5/8 X 12	2,250	3.33	0.63	34.95	22.95	12.00	.90	2.81	3.90
3/4 X 6	3,000	3.57	0.75	24.45	18.45	6.00	.98	3.33	4.69
3/4 X 12	3,000	5.34	0.75	36.85	24.85	12.00	.98	3.33	4.69