


Bodies, Stub Ends & Links



• Drop Forged Steel • Heat Treated • 5:1 Safety Factor

Turnbuckle Bodies Self Colored and Galvanized

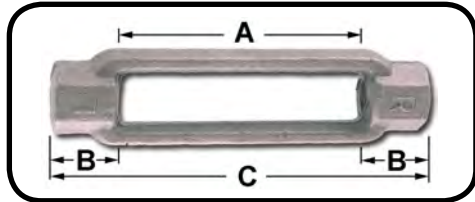

Meets Federal Spec FF-T-791b,
Type 1, Form 1, Class 2

Thread Dia X Take Up (in)	Working Load Limit (lbs.)	Weight Each (lbs.)	Dimensions (in)		
			A	B	C
3/8 X 6	1,200	.29	6	5/8	7-3/8
1/2 X 6	2,200	.60	6	1	7-7/16
5/8 X 6	3,500	.90	6	1-1/16	8-3/16
3/4 X 6	5,200	1.30	6	1-5/32	8-7/16
7/8 X 6	7,200	1.79	6	1-5/16	8-3/4
1 X 6	10,000	2.10	6	1-3/8	8-15/16
1-1/8 X 6	15,000	2.78	6	1-1/2	9-7/32
1-1/4 X 6	15,200	3.43	6	1-11/16	9-11/16
1-1/2 X 6	21,000	6.16	6	1-7/8	10




Meets Federal Spec FF-T-791b, Type 1, Form 1, Class 3

Stub End Turnbuckles Self Colored

Shank Dia X Take Up	Working Load Limit (lbs)	Weight Each (lbs)	Dimensions (in)				
			A	B	C	D	E
3/8 X 6	1,200	.75	.38	6.00	7.13	16.00	4.44
1/2 X 6	2,200	1.25	.50	6.00	7.50	16.00	4.25
5/8 X 6	3,500	2.11	.63	6.00	7.88	16.00	4.06
3/4 X 6	5,200	3.27	.75	6.00	8.25	17.00	4.38
7/8 X 6	7,200	4.78	.88	6.00	8.63	18.00	4.69
1 X 6	10,000	6.36	1.00	6.00	9.00	19.00	5.00
1-1/4 X 6	15,200	14.00	1.25	6.00	9.13	20.00	5.44

G-80 Alloy Coupling Links Painted



Chain Size (in)	Weight Each (lbs)	Working Load Limit (lbs)	Dimensions (in.)			
			A	B	C	D
9/32 (1/4)	.29	3,500	.36	1.88	1.90	.66
5/16	.67	4,500	.36	2.18	2.07	.69
3/8	.76	7,100	.45	2.53	2.47	.88
1/2	1.06	12,000	.64	3.44	3.31	1.13
5/8	2.43	18,100	.75	4.13	3.90	1.41
3/4	4.20	28,300	.93	4.92	4.62	1.63

Designed for use with Grade 80 chain