



Swage Sleeves

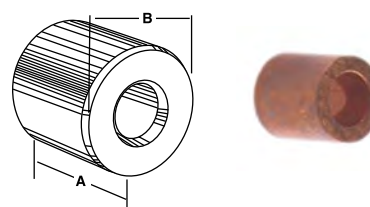

All copper sleeves are Made in the USA per Mil MS-51844-26 and are RoHS compliant

- Plain Copper
- Zinc Plated Copper
- Aluminum


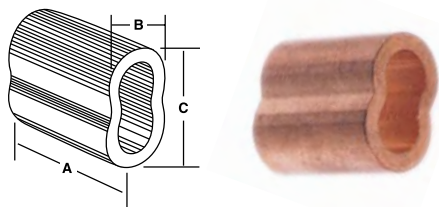


Copper Oval Sleeves Includes Zinc Plated

For Cable Diameter	Weight per 100 pcs (lbs)	Dimensions (in)		
		A	B	C
1/32	.05	0.248"	0.086"	0.129"
3/64	.17	0.390	0.134	0.201
1/16	.26	0.390	0.170	0.251
3/32	.53	0.400	0.224	0.369
1/8	1.57	0.575	0.324	0.429
5/32	2.24	0.625	0.365	0.592
3/16	5.12	1.000	0.449	0.671
7/32	4.45	0.875	0.461	0.713
1/4	7.87	1.138	0.515	0.810
5/16	11.55	1.125	0.665	1.010
3/8	14.76	1.312	0.727	1.110
1/2	37.70	1.900	0.965	1.480

Copper Stop Sleeves

For Cable Diameter	Weight per 100 pcs (lbs)	Dimensions (in)	
		A	B
3/64	.14	0.218"	0.203"
1/16	.19	0.218	0.203"
3/32	.78	0.328	0.328
1/8	.70	0.328	0.328
5/32	1.18	0.328	0.422
3/16	1.06	0.328	0.422
1/4	6.10	0.703	0.650
5/16	5.25	0.703	0.650

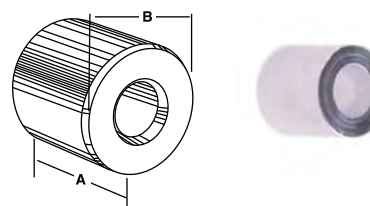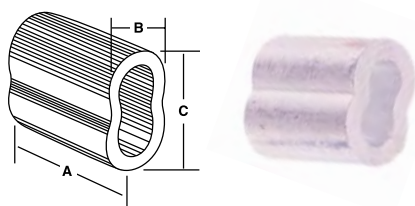

Aluminum Oval Sleeves

For Cable Diameter	Weight per 100 pcs (lbs)	Dimensions (in)		
		A	B	C
3/64	0.05	0.375"	0.133"	0.198"
1/16	0.09	0.375	0.172	0.250
3/32	0.32	0.500	0.281	0.406
1/8	0.64	0.625	0.344	0.500
5/32	0.80	0.688	0.375	0.562
3/16	1.55	1.010	0.445	0.666
7/32	2.22	1.060	0.500	0.750
1/4	2.52	1.125	0.536	0.812
5/16	4.50	1.250	0.687	1.032
3/8	6.07	1.438	0.750	1.156
1/2	17.60	2.000	1.060	1.625

Aluminum Stop Sleeves

For Cable Diameter	Weight per 100 pcs (lbs)	Dimensions (in)	
		A	B
1/16	0.060	0.156"	0.250"
3/32	0.250	0.313	0.344
1/8	0.210	0.313	0.344
5/32	0.420	0.344	0.438
3/16	0.390	0.344	0.438
1/4	0.204	0.688	0.688

