


Turnbuckles



- Drop Forged C1035 Steel
- Heavy Hex Body
- 5:1 Safety Factor

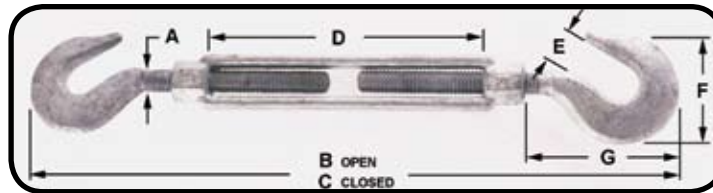

Meets Federal Spec FF-T-791b, Type 1, Form 1, Class 5

Hook & Hook Turnbuckles Hot Dipped Galvanized

Thread Dia X Take Up	Working Load Limit (lbs)	Weight Each (lbs)	Dimensions (in)						
			A	B Open	C Closed	D	E	F	G Closed
1/4 X 4	400	.29	0.25	12.09	8.09	4.00	.45	1.27	1.75
5/16 X 4 1/2	700	.49	0.31	13.47	9.47	4.50	.50	1.50	2.09
3/8 X 6	1,000	.78	0.38	17.94	11.94	6.00	.56	1.77	2.52
1/2 X 6	1,500	1.61	0.50	20.67	13.67	6.00	.66	2.28	3.23
1/2 X 12	1,500	2.26	0.50	32.67	19.67	12.00	.66	2.28	3.23
5/8 X 6	2,250	2.70	0.63	22.72	15.47	6.00	.90	2.81	3.90
5/8 X 12	2,250	3.78	0.63	34.72	21.47	12.00	.90	2.81	3.90
3/4 X 6	3,000	3.89	0.75	24.95	17.45	6.00	.98	3.33	4.69
3/4 X 12	3,000	5.83	0.75	36.95	23.45	12.00	.98	3.33	4.69
3/4 X 18	3,000	6.33	0.75	48.95	29.45	18.00	.98	3.33	4.69
7/8 X 12	4,000	8.10	0.88	38.66	24.91	12.00	1.13	3.78	5.10
1 X 12	5,000	11.93	1.00	41.20	27.20	12.00	1.25	4.25	6.36



Meets Federal Spec FF-T-791b, Type 1, Form 1, Class 3

Stub End Turnbuckles Self Colored

Shank Dia X Take Up	Working Load Limit (lbs)	Weight Each (lbs)	Dimensions (in)				
			A	B	C	D	E
3/8 X 6	1,200	.75	.38	6.00	7.13	16.00	4.44
1/2 X 6	2,200	1.25	.50	6.00	7.50	16.00	4.25
5/8 X 6	3,500	2.11	.63	6.00	7.88	16.00	4.06
3/4 X 6	5,200	3.27	.75	6.00	8.25	17.00	4.38
7/8 X 6	7,200	4.78	.88	6.00	8.63	18.00	4.69
1 X 6	10,000	6.36	1.00	6.00	9.00	19.00	5.00