


Turnbuckles

- Drop Forged C1035 Steel
- Heavy Hex Body
- 5:1 Safety Factor



**See These In Our
Stainless Steel
Section**

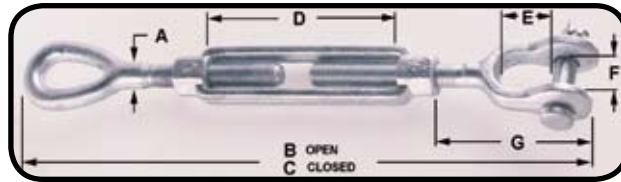

Meets Federal Spec FF-T-791b, Type 1, Form 1, Class 5

Jaw & Eye Turnbuckles Hot Dipped Galvanized

| Thread Dia X Take Up | Working Load Limit (lbs) | Weight Each (lbs) | Dimensions (in) | | | | | | |
|-------------------------|--------------------------------|-------------------------|-----------------|-----------|-------------|-------|------|------|-------------|
| | | | A | B Open | C Closed | D | E | F | G Closed |
| 1/4 X 4 | 500 | .30 | 0.25 | 12.07 | 8.07 | 4.00 | .62 | .45 | 1.58 |
| 5/16 X 4 1/2 | 800 | .50 | 0.31 | 14.01 | 9.51 | 4.50 | .87 | .50 | 1.98 |
| 3/8 X 6 | 1,200 | .80 | 0.38 | 17.77 | 11.77 | 6.00 | .87 | .54 | 2.12 |
| 1/2 X 6 | 2,200 | 1.51 | 0.50 | 20.48 | 13.48 | 6.00 | 1.06 | .55 | 2.75 |
| 1/2 X 9 | 2,200 | 1.71 | 0.50 | 26.48 | 16.48 | 9.00 | 1.06 | .55 | 2.75 |
| 1/2 X 12 | 2,200 | 2.08 | 0.50 | 32.48 | 19.48 | 12.00 | 1.06 | .55 | 2.75 |
| 5/8 X 6 | 3,500 | 2.35 | 0.63 | 22.53 | 15.28 | 6.00 | 1.31 | .82 | 3.50 |
| 5/8 X 9 | 3,500 | 3.17 | 0.63 | 28.53 | 18.28 | 9.00 | 1.31 | .82 | 3.50 |
| 5/8 X 12 | 3,500 | 3.61 | 0.63 | 34.53 | 21.28 | 12.00 | 1.31 | .82 | 3.50 |
| 3/4 X 6 | 5,200 | 4.00 | 0.75 | 24.61 | 17.11 | 6.00 | 1.50 | 1.03 | 4.18 |
| 3/4 X 9 | 5,200 | 4.75 | 0.75 | 30.61 | 20.11 | 9.00 | 1.50 | 1.03 | 4.18 |
| 3/4 X 12 | 5,200 | 5.93 | 0.75 | 36.61 | 23.11 | 12.00 | 1.50 | 1.03 | 4.18 |
| 3/4 X 18 | 5,200 | 7.00 | 0.75 | 48.61 | 29.11 | 18.00 | 1.50 | 1.03 | 4.18 |
| 7/8 X 12 | 7,200 | 8.36 | 0.88 | 38.32 | 24.57 | 12.00 | 1.75 | 1.23 | 4.85 |
| 7/8 X 18 | 7,200 | 9.75 | 0.88 | 50.32 | 30.57 | 18.00 | 1.75 | 1.23 | 4.85 |
| 1 X 6 | 10,000 | 8.92 | 1.00 | 28.89 | 20.89 | 6.00 | 2.06 | 1.31 | 5.53 |
| 1 X 12 | 10,000 | 11.20 | 1.00 | 40.89 | 26.89 | 12.00 | 2.06 | 1.31 | 5.53 |
| 1 X 18 | 10,000 | 13.30 | 1.00 | 52.89 | 32.89 | 18.00 | 2.06 | 1.31 | 5.53 |
| 1 X 24 | 10,000 | 17.00 | 1.00 | 64.89 | 38.89 | 24.00 | 2.06 | 1.31 | 5.53 |
| 1-1/4 X 12 | 15,200 | 19.42 | 1.25 | 44.55 | 30.05 | 12.00 | 2.81 | 1.86 | 7.21 |
| 1-1/4 X 18 | 15,200 | 24.18 | 1.25 | 56.05 | 36.05 | 18.00 | 2.81 | 1.86 | 7.21 |
| 1-1/4 X 24 | 15,200 | 28.50 | 1.25 | 68.55 | 42.05 | 24.00 | 2.81 | 1.86 | 7.21 |
| 1-1/2 X 12 | 21,400 | 28.99 | 1.50 | 47.25 | 32.25 | 12.00 | 2.81 | 2.25 | 7.88 |
| 1-1/2 X 18 | 21,400 | 35.00 | 1.50 | 59.25 | 38.25 | 18.00 | 2.81 | 2.25 | 7.88 |
| 1-1/2 X 24 | 21,400 | 39.18 | 1.50 | 71.25 | 44.25 | 24.00 | 2.81 | 2.25 | 7.88 |
| 1-3/4 X 18 | 28,000 | 53.75 | 1.75 | 59.78 | 41.78 | 18.00 | 3.38 | 2.60 | 9.40 |
| 1-3/4 X 24 | 28,000 | 60.68 | 1.75 | 71.78 | 47.78 | 24.00 | 3.38 | 2.60 | 9.40 |
| 2 X 24 | 37,000 | 89.00 | 2.00 | 77.95 | 53.95 | 24.00 | 3.69 | 2.62 | 11.86 |
| 2-1/2 X 24 | 60,000 | 150.00 | 2.50 | 82.40 | 58.40 | 24.00 | 4.44 | 3.06 | 13.56 |
| 2-3/4 X 24 | 75,000 | 183.00 | 2.75 | 85.50 | 61.50 | 24.00 | 4.19 | 3.68 | 15.22 |

