


# Turnbuckles



- Drop Forged C1035 Steel
- Heavy Hex Body
- 5:1 Safety Factor

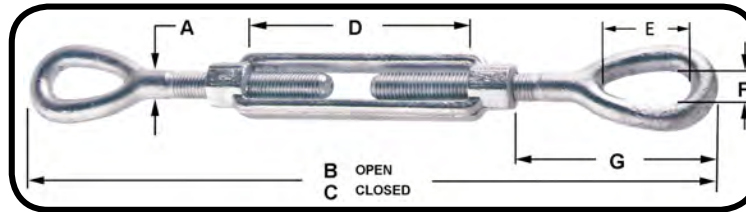

Meets Federal Spec FF-T-791b, Type 1, Form 1, Class 4

See These In Our  
Stainless Steel  
Section

## Eye & Eye Turnbuckles Hot Dipped Galvanized

Thread Dia X Take Up	Working Load Limit (lbs)	Weight Each (lbs)	Dimensions (in)						
			A	B Open	C Closed	D	E	F	G Closed
1/4 X 4	500	0.30	0.25	12.25	8.25	4.00	0.78	0.34	1.75
5/16 X 4 1/2	800	0.47	0.31	14.12	9.62	4.50	0.94	0.44	2.09
3/8 X 6	1,200	0.75	0.38	18.16	12.16	6.00	1.12	0.53	2.52
1/2 X 6	2,200	1.60	0.50	19.96	13.96	6.00	1.44	0.72	3.23
1/2 X 9	2,200	1.83	0.50	25.96	16.96	9.00	1.44	0.72	3.23
1/2 X 12	2,200	2.08	0.50	31.96	19.96	12.00	1.44	0.72	3.23
5/8 X 6	3,500	2.75	0.63	21.68	15.68	6.00	1.75	0.88	3.90
5/8 X 9	3,500	3.13	0.63	27.68	18.68	9.00	1.75	0.88	3.90
5/8 X 12	3,500	3.50	0.63	33.68	21.68	12.00	1.75	0.88	3.90
3/4 X 6	5,200	3.89	0.75	23.62	17.62	6.00	2.09	1.00	4.69
3/4 X 9	5,200	4.61	0.75	29.62	20.62	9.00	2.09	1.00	4.69
3/4 X 12	5,200	5.43	0.75	35.62	23.62	12.00	2.09	1.00	4.69
3/4 X 18	5,200	7.25	0.75	47.62	29.62	18.00	2.09	1.00	4.69
7/8 X 12	7,200	8.10	0.88	36.82	24.82	12.00	2.38	1.25	5.10
7/8 X 18	7,200	9.95	0.88	48.82	30.82	18.00	2.38	1.25	5.10
1 X 6	10,000	9.33	1.00	27.72	21.72	6.00	3.00	1.44	6.36
1 X 12	10,000	11.93	1.00	39.97	27.72	12.00	3.00	1.44	6.36
1 X 18	10,000	14.00	1.00	51.72	33.72	18.00	3.00	1.44	6.36
1 X 24	10,000	17.25	1.00	63.72	39.72	24.00	3.00	1.44	6.36
1-1/4 X 12	15,200	19.00	1.25	42.56	30.56	12.00	3.56	1.81	7.72
1-1/4 X 18	15,200	23.00	1.25	54.56	36.56	18.00	3.56	1.81	7.72
1-1/4 X 24	15,200	27.00	1.25	66.56	42.56	24.00	3.56	1.81	7.72
1-1/2 X 12	21,400	27.50	1.50	45.00	33.00	12.00	4.06	2.12	8.62
1-1/2 X 18	21,400	31.00	1.50	57.00	39.00	18.00	4.06	2.12	8.62
1-1/2 X 24	21,400	37.50	1.50	69.00	45.34	24.00	4.06	2.12	8.62
1-3/4 X 18	28,000	52.50	1.75	60.38	42.38	18.00	4.62	2.38	10.00
1-3/4 X 24	28,000	58.00	1.75	72.38	48.38	24.00	4.62	2.38	10.00
2 X 24	37,000	85.25	2.00	79.19	55.19	24.00	5.75	2.69	13.09
2-1/2 X 24	60,000	144.25	2.50	82.62	58.62	24.00	6.50	3.12	13.78
2-3/4 X 24	75,000	194.00	2.75	85.50	61.50	24.00	7.00	3.25	15.22

